


## **DATASHEET**

# SMD • Middle Power LED 67-21S/Y2C-D8595B7L32128Z6/2T



#### **Features**

- · PLCC-2 package
- · Top view Yellow LED
- · Wide viewing angle
- · Pb-free
- · RoHS compliant

## **Description**

The Everlight 67-21S package has high efficacy, Middle Power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

## **Applications**

- · Decorative and Entertainment Lighting
- · Agriculture Lighting
- · General use



## **Device Selection Guide**

Chip Materials	Emitted Color	Resin Color
AlGalnP	Yellow	Water Clear

## Absolute Maximum Ratings (T<sub>Soldering</sub>=25℃)

Parameter	Symbol	Rating	Unit	
Forward Current	l <sub>F</sub>	70	mA	
Peak Forward Current (Duty 1/10 @10ms)	I <sub>FP</sub>	140	mA	
Power Dissipation	P <sub>d</sub>	200	mW	
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C	
Storage Temperature	T <sub>stg</sub>	-40 ~ <b>+</b> 100	°C	
Thermal Resistance (Junction / Soldering point)	Rth J-S	50	°C/W	
Junction Temperature	Tj	115	°C	
Soldering Temperature	т.	Reflow Soldering : 260 °C for 10 sec.		
	T <sub>sol</sub>	Hand Soldering : 350 °C for 3 sec.		

Note:

## Electro-Optical Characteristics (T<sub>Soldering</sub>=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous flux	lv	8.5		13.0	lm	I <sub>F</sub> =60mA
Forward Voltage	VF	2.1		2.8	V	I <sub>F</sub> =60mA
Viewing Angle	2θ <sub>1/2</sub>		120		deg	I <sub>F</sub> =60mA
Reverse Current	IR			50	μΑ	V <sub>R</sub> =5V
Neverse Current	IIX			50	μΑ	VR = 3 V

Notes

The products are sensitive to static electricity and must be carefully taken when handling products

<sup>1.</sup> Tolerance of Luminous flux: ±11%.

<sup>2.</sup> Tolerance of Forward Voltage: ±0.1V.



**Bin Range of Luminous flux** 

Bin Code	Min.	Max.	Unit	Condition
B7	8.5	9.0		
B8	9.0	9.5	_	
B9	9.5	10.0	l 1 00	1 00 - 1
L1	10.0	11.0	– Im	I <sub>F</sub> =60mA
L2	11.0	12.0		
L3	12.0	13.0		

Notes:

Tolerance of Luminous flux: ±11%s

## **Bin Range of Forward Voltage**

Bin Code	Min.	Max.	Unit	Condition
28	2.1	2.2		
29	2.2	2.3		
30	2.3	2.4		
31	2.4	2.5	V	I <sub>F</sub> =60mA
32	2.5	2.6		
33	2.6	2.7		
34	2.7	2.8		

Note:

Tolerance of Forward Voltage: ±0.1V.

## **Dominant Wavelength Bins**


Bin Code	Min.	Max.	Unit	Condition
Y52	585	590		I 00 ··· A
Y53	590	595	nm	I <sub>F</sub> =60mA

Notes:

Dominant / Peak wavelength measurement tolerance: ±1nm.



## **Spectrum Distribution**

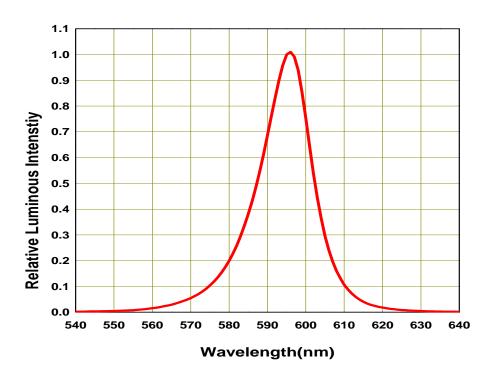

## **Typical Electro-Optical Characteristics Curves**

Fig.1 – Forward Voltage Shift vs. Junction Temperature


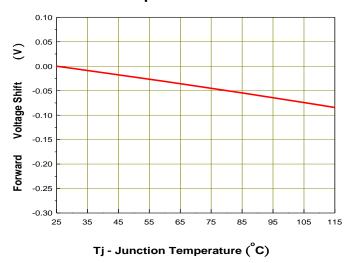


Fig.2 - Relative Radiometric Power vs. Forward Current





## **Typical Electro-Optical Characteristics Curves**

Fig.3 - Relative Luminous Intensity vs. Junction Temperature

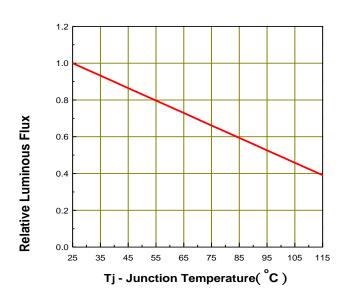


Fig.4 - Forward Current vs. Forward Voltage




Fig.5 – Max. Driving Forward Current vs. Soldering Temperature

Rth j-s=50 °C/W






Fig.6 – Radiation Diagram





## **Package Dimension**

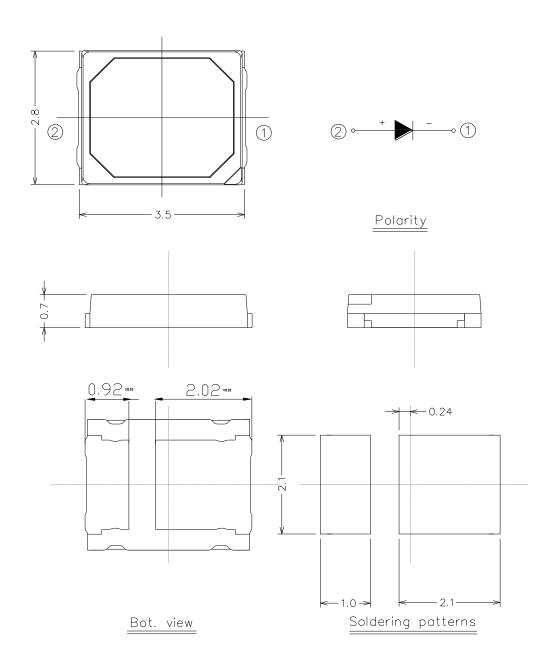

#### Note:

Tolerance unless mentioned is ±0.15 mm; Unit = mm




## **Moisture Resistant Packing Materials**

#### **Label Explanation**



- · CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- · CAT: Luminous Intensity Rank
- · HUE: Dom. Wavelength Rank
- · REF: Forward Voltage Rank
- LOT No: Lot Number

#### **Reel Dimensions**

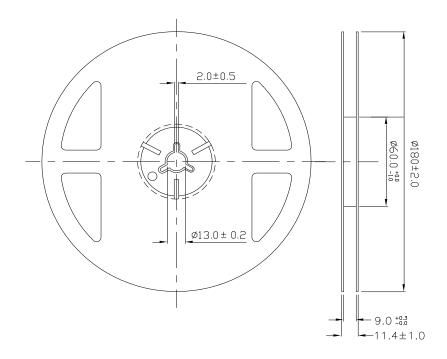


Note:

Tolerances unless mentioned ±0.1mm. Unit = mm




Carrier Tape Dimensions: Loaded Quantity 250/500/1000/2000/3000/4000 pcs. Per Reel

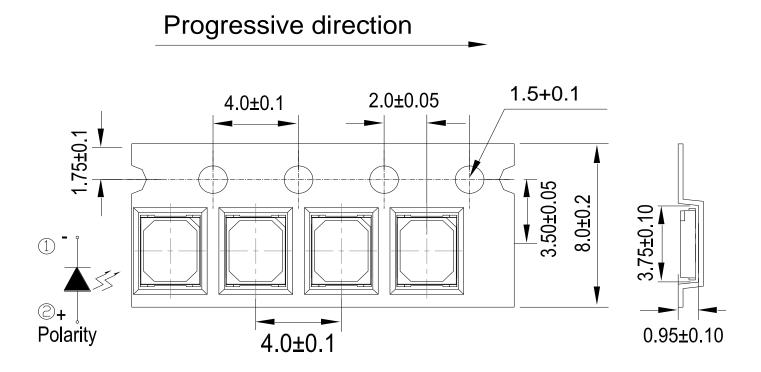

Note:

Tolerance unless mentioned is ±0.1mm; Unit = mm

### **Moisture Resistant Packing Process**

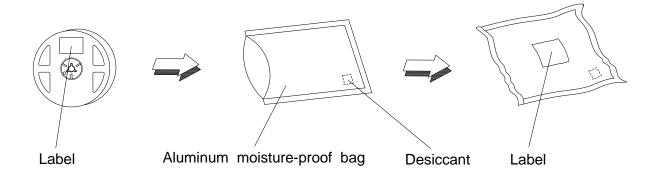



## **Reliability Test Items and Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260°C/10sec.	6 Min.	22 PCS.	0/1
2	Thermal Shock	H : +100°C 20min ∫ 10 sec L : -10°C 20min	200 Cycles	22 PCS.	0/1
3	Temperature Cycle	H:+100°C 30min ∫ 5 min L:-40°C 30min	200 Cycles	22 PCS.	0/1
4	High Temperature/Humidity Storage	Ta=85°C,85%RH	1000 Hrs.	22 PCS.	0/1
5	High Temperature/Humidity Operation	Ta=85°C,85%RH, $I_F = 35mA$	1000 Hrs.	22 PCS.	0/1
6	Low Temperature Storage	Ta=-40°C	1000 Hrs.	22 PCS.	0/1
7	High Temperature Storage	Ta=85°C	1000 Hrs.	22 PCS.	0/1
8	Low Temperature Operation Life	Ta=-40°C, I <sub>F</sub> = 70 mA	1000 Hrs.	22 PCS.	0/1
9	High Temperature Operation/ Life#1	Ta=25°C, I <sub>F</sub> = 70 mA	1000 Hrs.	22 PCS.	0/1
10	High Temperature Operation/ Life#2	Ta=55°C, I <sub>F</sub> =70mA	1000 Hrs.	22 PCS.	0/1
11	High Temperature Operation/ Life#3	Ta=85°C, I <sub>F</sub> = 35 mA	1000 Hrs.	22 PCS.	0/1



#### **Precautions for Use**

#### 1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

#### 3. Soldering Condition

3.1 Pb-free solder temperature profile

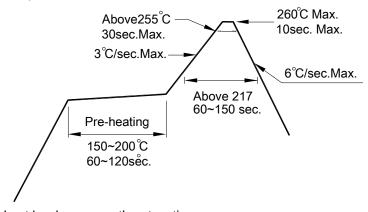

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

