



FEATURES :

- * 3216 mm [1206"Size]
- * Normal Blow
- * RoHS-Compliant Products


APPROVALS :

- * Recognized under the Component Program of U.L. Guide JDYX2, File No. E195987




11 W SERIES

DIMENSIONS :

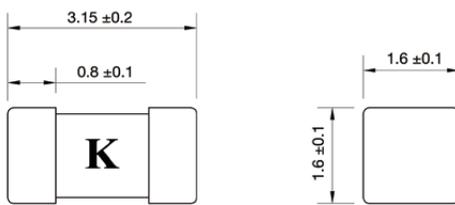

LAND PATTERN :

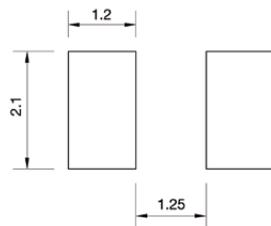


Unit : mm

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time
100%	4 hours Min.
200%	60 sec Max.
1000%	0.001 sec Min. / 0.01 sec Max.

AVERAGE TIME CURRENT CURVES :

TYPICAL

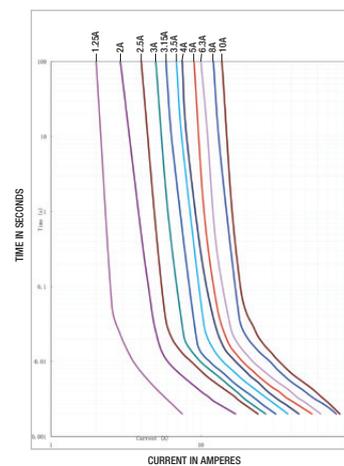

SPECIFICATIONS :

Product Code	Ampere Rating	Voltage Rating DC	Interrupting Rating*1	Typical Melting I ² t at 10 I _n (A ² sec) ^{*2}
11W 1000 G	1 A	63 V	50 A	TBA
11W 1250 G	1.25 A	63 V	50 A	0.261
11W 1500 G	1.5 A	63 V	50 A	TBD
11W 1600 G	1.6 A	63 V	50 A	TBD
11W 2000 G	2 A	63 V	50 A	0.80
11W 2500 G	2.5 A	63 V	50 A	1.25
11W 3000 G	3 A	63 V	50 A	1.80
11W 3150 G	3.15 A	63 V	50 A	1.98
11W 3500 G	3.5 A	63 V	50 A	3.89
11W 4000 G	4 A	63 V	50 A	4.32
11W 5000 G	5 A	63 V	50 A	5.00
11W 6300 G	6.3 A	63 V	50 A	7.62
11W 7000 G	7 A	63 V	50 A	TBD
11W 8000 G	8 A	63 V	50 A	11.52
11W 10K G	10 A	63 V	50 A	12.28

NOTE:

1. DC Interrupting Rating - Measured at designated voltage, time constant of less than 50 microseconds, battery source.
2. Typical Melting I²t - Measured with a battery pack at rated DC voltage at 10 times rated current, not to exceed I.R.
3. Operating Current - An operating current of 75% or less of rated current is recommended, with further derating required at elevated ambient temperature.
4. Ask PICO sales for the items not mentioned in this Catalog.
5. Consult PICO sales for the details.