


## PACIFIC AUTOFUSE SERIES


## PACIFIC MINIFUSE SERIES

### DIMENSIONS :

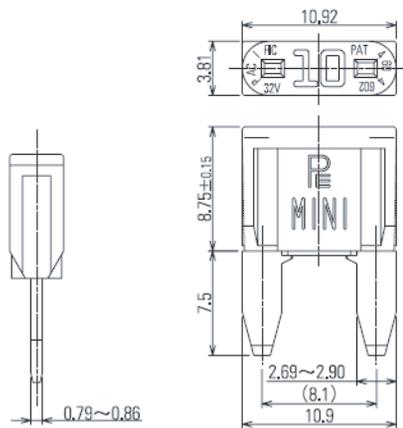

Unit : mm

### DIMENSIONS :

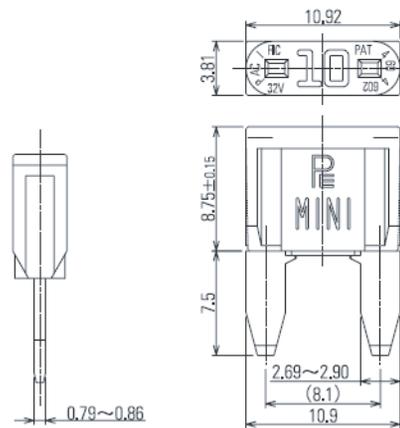

Unit : mm

### ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time	
	Minimum	Maximum
110%	100 hours	-
135%	0.75 sec	1800 sec
200%	0.15 sec	5 sec
350%	0.04 sec	0.5 sec
600%	0.02 sec	0.2 sec

\* Fuse Characteristic may vary according to the conditions under which they are used.

**Ampere Rating :** 1 - 40A

**Voltage Rating :** DC 32V or less

### DESIGN STANDARDS :

\* SAE ( Society of Automotive Engineers) J1284

### APPROVALS :

\* Recognised under the Components Program of Underwriters Laboratories Guide JFHR2, File No. E56412 [3A - 40A]

Please contact Pico for the other Ampere Ratings, Engineering Specification, additional technical and environmental data.

### ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time	
	Minimum	Maximum
110%	100 hours	-
135%	0.75 sec	1800 sec
200%	0.15 sec	5 sec
350%	0.04 sec	0.5 sec
600%	0.02 sec	0.2 sec

**Ampere Rating :** 2 - 30A

**Voltage Rating :** DC 32V or less

### DESIGN STANDARDS :

\* SAE ( Society of Automotive Engineers) J2077