


## Current Transducer LTC 500-SF/SP7

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 500 \text{ A}$$



### Electrical data

$I_{PN}$	Primary nominal RMS current	500	A
$I_{PM}$	Primary current, measuring range @ $\pm 24 \text{ V}$	0 ... $\pm 1200$	A
$R_M$	Measuring resistance with $\pm 15 \text{ V}$	@ $\pm 500 \text{ A}_{max}$	$R_{M min}$ $R_{M max}$ 0 50 $\Omega$
		@ $\pm 900 \text{ A}_{max}$	0 7 $\Omega$
	with $\pm 24 \text{ V}$	@ $\pm 500 \text{ A}_{max}$	0 110 $\Omega$
		@ $\pm 1200 \text{ A}_{max}$	0 20 $\Omega$
$I_{SN}$	Secondary nominal RMS current	125	mA
$N_P/N_S$	Turns ratio	1 : 4000	
$U_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 15 \dots 24$	V
$I_C$	Current consumption	$< 35 (@ \pm 24 \text{ V}) + I_S$	mA

### Accuracy - Dynamic performance data

$\varepsilon$	Error @ $I_{PN}, T_A = 25 \text{ }^\circ\text{C}$	$< \pm 0.6$	%
$\varepsilon_L$	Linearity error	$< 0.1$	%
$I_O$	Offset current @ $I_P = 0, T_A = 25 \text{ }^\circ\text{C}$	Max $\pm 0.5$	mA
$I_{OT}$	Temperature variation of $I_O$	$-40 \text{ }^\circ\text{C} \dots +85 \text{ }^\circ\text{C}$	$\pm 0.8$ mA
$t_{D90}$	Delay time <sup>1)</sup> to 90 % of $I_{PN}$	$< 1$	$\mu\text{s}$
$BW$	Frequency bandwidth ( $-1 \text{ dB}$ )	DC ... 100	kHz

### General data

$T_A$	Ambient operating temperature	$-40 \dots + 85$	$^\circ\text{C}$
$T_S$	Ambient storage temperature	$-45 \dots + 90$	$^\circ\text{C}$
$R_S$	Resistance of secondary winding @ $T_A = 85 \text{ }^\circ\text{C}$	47	$\Omega$
$m$	Mass	410	g
	Standards	EN 50155: 2007 EN 50121-3-2: 2006	

### Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

### Special Feature

- Molex Mini-Fit. Jr. connector.

### Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

### Applications

- Single or three phase inverters
- Propulsion and braking choppers
- Propulsion converters
- Auxiliary converters
- Battery chargers.

### Application Domain

- Traction.

**Note:** <sup>1)</sup> For a  $di/dt = 100 \text{ A}/\mu\text{s}$ .

## Current Transducer LTC 500-SF/SP7

### Insulation coordination

$U_d$	RMS voltage for AC insulation test, 50 Hz, 1 min	12 <sup>1)</sup>	kV
		1 <sup>2)</sup>	kV
$U_{Ni}$	Impulse withstand voltage 1.2/50 $\mu$ s	29.5	kV
		Min	
$d_{Cp}$	Creepage distance	44	mm
$d_{Ci}$	Clearance	43	mm
$CTI$	Comparative tracking index (group I)	600	

**Notes:** <sup>1)</sup> Between primary and secondary + shield

<sup>2)</sup> Between secondary and shield.

## Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions LTC 500-SF/SP7 (in mm)

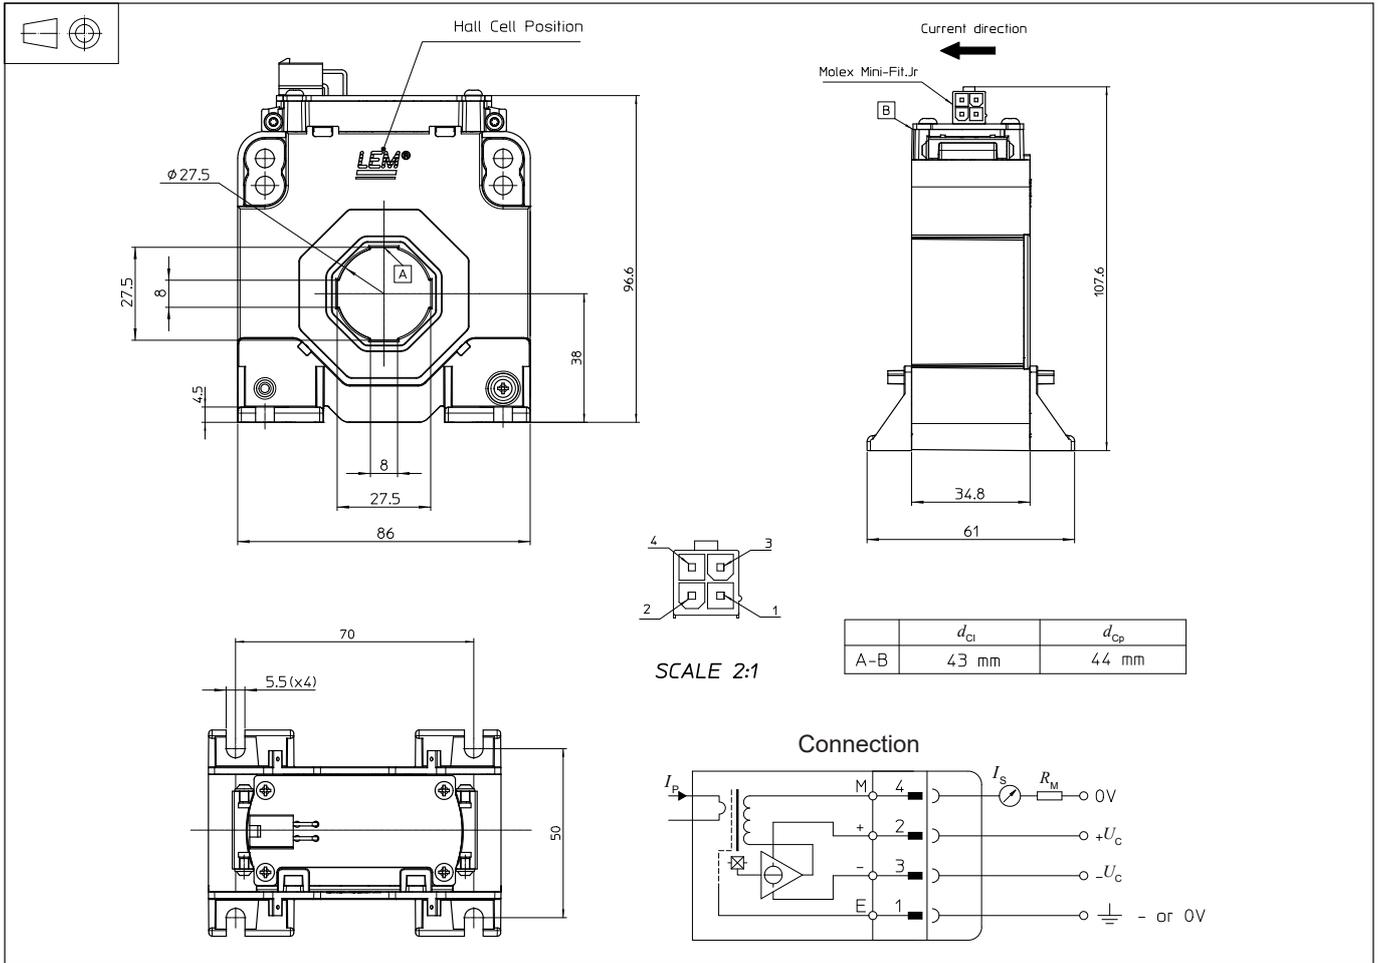

### Mechanical characteristics

- General tolerance  $\pm 1$  mm
- Transducer fastening 4 slots  $\phi 5.5$  mm  
4 M5 steel screws  
Recommended fastening torque 2.2 N·m
- Primary through-hole  $\phi 27.5$  mm
- Connection of secondary Molex Mini-Fit. Jr. connector.

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100 °C.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: <https://www.lem.com/en/file/3137/download/>.
- Dynamic performances ( $di/dt$  and delay time) are best with a single bar completely filling the primary hole.