Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

Features

1. Waterproof Connector with Excellent Weather Resistance for Outdoor Use

With a highly durable and weather resistant plastic shell, HR41 is a lightweight connector ideal for outdoor use.


2. Waterproof Performance

IP67. IP68 when mated.

IP67: Left for 30 min. at a water depth of 1m. IP68: Left for 14 days at a water depth of 2m.

3. Easy to Operate Bayonet Lock

Bayonet lock that completes locking in a single action for easy installment even in dimly lit areas.



Bayonet Lock

4. Supports Field Assembly

The simple crimp connection and easy assembly design are ideal for on-site assembly.

Compatible with Commerical Tools


Crimp contacts can be terminated using JIS C 9711 crimp tools.

6. Sequence Design

3pos. : 2 Stage Sequence 5pos.: 3 Stage Sequence



Ground Comes into Contact First (3pos.)



Sequence Design (5pos.)

7. Designed to Accommodate Hot Swapping (5pos. Plug)

Hot Swapping Conditions: 20A AC/300V AC (50 mating cycles)

Test method conforms to UL1977 standards.

8. Surge Resistance

Walls between adjacent contacts provides insulation against 15kV surges caused by lightning.

9. Gold-plated Contact Portion

The interface of the contact is gold plated for high contact reliability.

Safety Standard Certified

UL, TÜV certification have been achieved.



Product Specifications

	Rated Current	3pos.: 38A (Ambient Temperature 25℃)	Operating Temperature (Note 2)	-40 to +105℃
(Note 1)		5pos.: 20A (When using 4pos. with Ground Removed)	Storage Temperature Range	-10 to +60℃
Rated Voltage 1000V AC/DC				

Dated Ourrent (Note 1)	3pos.: 20A	Operating Temperature (Note 2)	-40 to +65℃	
UL、TÜV	Rated Current (Note 1)	5pos.: 10A	Storage Temperature Range	-10 to +60°C
	Rated Voltage	600V AC/DC		

Items	Specifications	Conditions
Contact Resistance	2mΩ Max.	Measured at 1A DC
Insulation Resistance	5000M Ω Min.	Measured at 500V DC
Withstanding Voltage	No flashover or breakdown	3 pos. : Apply 4260V AC for 1 min. 5 pos. : Apply 2200V AC for 1 min.
Vibration Resistance	No electrical discontinuity of 10 μ s or more	10 cycles in 3 axial directions at a frequency of 10-500-10Hz, half amplitude 0.75mm and 11 min/cycle
Shock	No electrical discontinuity of 10 μ s or more	Acceleration 490m/s², duration 11ms, half-sine wave,3 times each for 3 axial directions
Mating Durability Contact resistance 4m Ω Max.		200 mating cycles
Temperature Cycle	Insulation resistance 5000 Ω Min.	-55°C: 30min. → Ambient Temp.: 2-3min. → 85°C: 30min. → Ambient Temp.: 2-3min., 5 cycles
Salt Spray	No functional issues	5% concentration salt water sprayed for 1,000 hours in mated connector condition.
Moisture Resistance (Steady State)	Insulation Resistance : 50M Ω (High Humidity) 500M Ω (Dry)	40°C temperature, 90 to 95% humidity for 96 hours
Water Resistance	No water intrusion inside connector	Left submerged at a depth of 2m in the mated condition for 14 days

Note 1: Varies depending on the temperature the connector is used at.


When applying the UL, TÜV standards, use within the derating curve.


Note 2: Includes temperature rise due to current flow.

Note 3: Depending on the cable design and specifications, cable clamping force, rotation force,

waterproof performance, etc. may differ. Please confirm before use.

[Reference] Derating Curve

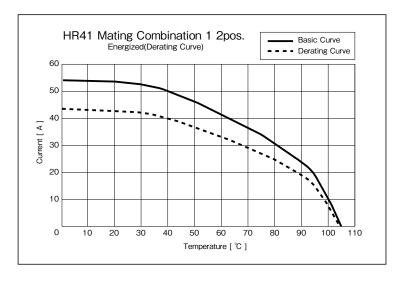

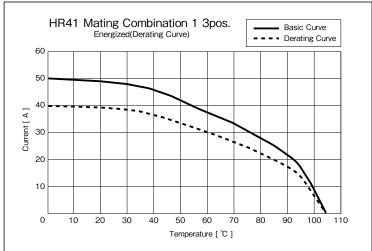

Note 1: The derating curve is derived from the basic curve multiplied by the derating factor of 0.8. Note 2: The measurement method of the derating curve is as follows:

- - · HR41, unused prior to testing.
 - · Conductor cross-sectional area of test cable : 5.5mm²
 - \cdot Test condition : Measured after power supplied while the mated connectors are in a stationary state.

Materials/Finish

Item	Material	Finish	UL Standard (Noncombustible)
Insulator	Polyamide, PBT	-	UL94V-0
Contact	Copper Alloy	Partially Gold Plated	-
O-ring, Gasket	Silicone Rubber	-	-

Product Number Structure

Refer to the chart below when determining the product specifications from the product number. Please select from the product numbers listed in this catalog when placing orders.

Connector


HR41 - 25 W B P A - 3 S C (##)

Crimp Contact

HR41 - S C - 1 2 1 (##)

Series Name	HR41	7 No. of Pos. 3, 5
2 Shell Size	25	Contact Gender S : Female Contact
		P : Male Contact
3 Specification	W: Waterproof Type	Contact Assembly C : Crimp
4 Lock Mecha	nism B : Bayonet Lock	Additional specifications are identified by adding (01), (02), etc.
5 Shell Type	P : Plug	1 : Loose Contacts
R : Receptacle J : Jack	Design 2: If the design of contacts of the same size differs, 1, 2, 3 etc. are added to distinguish them	
6 Serial Mark		Contact Area 1 : Gold Plated Plating

Diagram of Connector Mating Combinations

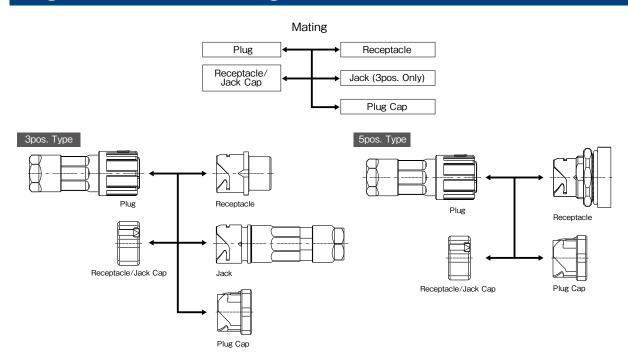

Connector

Plug	Receptacle	Jack
HR41-25WBPD-3SC		
HR41-25WBPE-3SC	HR41-25WBR-3PC	HR41-25WBJB-3PC HR41-25WBJF-3PC
HR41-25WBPF-3SC		= =
HR41-25WBP-5SC	HR41-25WBRA-5PC	-

Plug cap

Plug	Сар	
HR41-25WBPD-3SC		
HR41-25WBPE-3SC	HR41-25WBP-C	
HR41-25WBPF-3SC	1041-23WDP-0	
HR41-25WBP-5SC		

Receptacle/Jack Cap

Receptacle	Сар
HR41-25WBR-3PC	
HR41-25WBRA-5PC	HR41-25WBR-C
HR41-25WBJB-3PC	ПП41-25WBN-С
HR41-25WBJF-3PC	



■ Applicable Contacts Combinations

Plug	Crimp Ccontact
HR41-25WBPD-3SC	HR41-SC-111
HR41-25WBPE-3SC	HR41-SC-121
HR41-25WBPF-3SC	HR41-SC-141
HR41-25WBP-5SC	HR41-SC-151


Receptacle	Crimp Contact
HR41-25WBR-3PC	HR41-PC-111 HR41-PC-121
HR41-25WBRA-5PC	HR41-PC-151

Jack	Crimp Contact
HR41-25WBJB-3PC	HR41-PC-111
HR41-25WBJF-3PC	HR41-PC-121

3pos. Type

Receptacle (Flange Type)






Part No.	HRS No.	No. of Pos.	Purchase Unit
HR41-25WBR-3PC	CL0141-0006-0-00	3	10pcs per bag (Note 1)

Note 1: Orders are accepted in multiples of 10pcs.

Note 2: Male contacts can be assembled into the above product.

Male Contact






Туре	Part No.	HRS No.	Plating Thickness of Contact Portion	Applicable Cable (Meets all of conditions 1, 2, and 3)	Purchase Unit
	HR41-PC-111	CL0141-0002-0-00	0.2 μ m	0.2 μ m 1. Conductor Cross-section : 3.3 to 5.5mm ²	
	HR41-PC-111 (01)	CL0141-0002-0-01	0.76 μ m	2. Conductor Outer Dia. : φ 3.1 Max.3. Jacket Outer Dia. : φ 6 Max.(10 to 12 AWG)	3pcs per bag
Loose Contacts	se Contacts HR41-PC-121 CL0141-0004-5-00 0.2	0.2 μ m	1. Conductor Cross-section: 1.3 to 2.5mm ²	(Note)	
	HR41-PC-121 (01)	CL0141-0004-5-01	0.76 μ m	2. Conductor Outer Dia. : φ 2.0 Max.3. Jacket Outer Dia. : φ 6 Max.(14 to 16 AWG)	

Note: Orders are accepted based on bag increments.

Jack






Part No.	HRS No.	No. of Pos.	Applicable Cable	Purchase Unit
HR41-25WBJB-3PC	CL0141-0017-7-00	2	ϕ 11.8 ± 0.4	1pc per bag
HR41-25WBJF-3PC	CL0141-0019-2-00	3	φ 13.5 ± 0.7	10pcs per bag (Note 1)

Note 1: Orders are accepted in multiples of 10pcs.

Note 2: Male contacts can be assembled into the above product.

Male Contact






Туре	Part No.	HRS No.	Plating Thickness of Contact Portion	Applicable Cable (Meets all of conditions 1, 2, and 3)	Purchase Unit
	HR41-PC-111	CL0141-0002-0-00	0.2 μ m	1. Conductor Cross-section: 3.3 to 5.5mm ²	
Loose Contacts	HR41-PC-111(01) CL0141-0002-0-01 0.76 μ		0.76 μ m	 Conductor Outer Dia. : φ 3.1 Max. Jacket Outer Dia. : φ 6 Max. (10 to 12 AWG) 	3pcs per bag
Loose Condicts	HR41-PC-121	CL0141-0004-5-00	0.2 μ m 1. Conductor Cross-section : 1.3 to 2.5mm²		(Note)
	HR41-PC-121(01)	CL0141-0004-5-01	0.76 μ m	 Conductor Outer Dia. : φ 2.0 Max. Jacket Outer Dia. : φ 6 Max. (14 to 16 AWG) 	

Note : Orders are accepted based on bag increments.

Plug








Part No.	HRS No.	No. of Pos.	Applicable Cable	Remarks	Purchase Unit
HR41-25WBPD-3SC	CL0141-0023-0-00		$\phi 9.0 \pm 0.6$		
HR41-25WBPE-3SC	CL0141-0024-2-00	3	ϕ 10.1 \pm 0.6	2-step Seguence	10pcs per bag (Note 1)
HR41-25WBPF-3SC	CL0141-0026-8-00		φ 13.5 ± 0.7		

Note 1: Orders are accepted in multiples of 10pcs.

Note 2: Female contacts can be assembled into the above product.

Female Contact






Туре	Part No.	HRS No.	Plating Thickness of Contact Portion	Applicable Cable (Meets all of conditions 1, 2, and 3)	Purchase Unit
	HR41-SC-111	CL0141-0001-7-00	0.2 μ m	1. Conductor Cross-section: 3.3 to 5.5mm ²	
	HR41-SC-111(01) CL0141-0001-7-01 0.76		0.76 μ m	 Conductor Outer Dia. : φ 3.1 Max. Jacket Outer Dia. : φ 6 Max. (10 to 12 AWG) 	
	HR41-SC-121 CL0141-0003-2-00		0.2 μ m	1. Conductor Cross-section: 1.3 to 2.5mm ²	
Reel Contacts	HR41-SC-121(01)	CL0141-0003-2-01	2. Conductor Outer Dia. : φ 3. Jacket Outer Dia. : φ 6 N (14 to 16 AWG)		3pcs per bag (Note 1)
	HR41-SC-141 CL0	CL0141-0008-6-00	0.2 μ m	1. Conductor Cross-section: 5.5 to 6.5mm ²	
	HR41-SC-141(01)	CL0141-0008-6-01	0.76 μ m	 Conductor Outer Dia. : φ 3.4 Max. Jacket Outer Dia. : φ 6 Max. (10 AWG) 	

Note 1 : Orders are accepted based on bag increments. Note 2 : The contact design of HR41-SC-151, HR41-SC-111, HR41-SC-121, and HR41-SC-141 differ, so be careful when assembling for use.

5pos. Type

Receptacle (Bulkhead Type)






Part No.	HRS No.	No. of Pos.	Purchase Unit
HR41-25WBRA-5PC	CL0141-0010-8-00	5	10pcs per bag (Note 1)

Note 1: Orders are accepted in multiples of 10pcs.

Note 2: Male contacts can be assembled into the above product.

Male Contact






Туре	Part No.	HRS No.	Plating Thickness of Contact Portion	Applicable Cable (Meets all of conditions 1, 2, and 3)	Purchase Unit
Loose Contacts	HR41-PC-151	CL0141-0012-3-00	0.2 μ m	 Conductor Cross-section: 0.75 to 2.5mm² Conductor Outer Dia.: φ 2.4 Max. Jacket Outer Dia.: φ 6 Max. (14-18 AWG) 	5pcs per bag (Note)

Note 1: Orders are accepted based in bag increments.

Plug








Part No.	HRS No.	No. of Pos.	Applicable Cable	Remarks	Purchase Unit
HR41-25WBP-5SC	CL0141-0009-9-00	5	ϕ 11 ± 0.3	3 Step Sequence	10pcs per bag (Note 1)

Note 1: Orders are accepted in multiples of 10pcs.

Note 2 : Female contacts can be assembled into the above product.

• Female Contact





Туре	Part No.	HRS No.	Plating Thickness of Contact Portion	Applicable Cable (Meets all of conditions 1, 2, and 3)	Purchase Unit
Loose Contacts	HR41-SC-151	CL0141-0011-0-00	0.2 μ m	 Conductor Cross-section: 0.75 to 2.5mm² Conductor Outer Dia.: φ 2.4 Max. Jacket Outer Dia.: φ 6 Max. (14-18 AWG) 	10pcs per bag (Note 1)

Note 1: Orders are accepted based on bag increments.


Note 2: The contact design of HR41-SC-151, HR41-SC-111, HR41-SC-121, and HR41-SC-141 differ, so be careful when assembling for use.




Cap

Plug Cap









Part No.	HRS No.	Applicable Connector	Purchase Unit
HR41-25WBP-C	CL0141-0021-4-00	HR41-25WBPD-3SC HR41-25WBPE-3SC HR41-25WBPF-3SC HR41-25WBP-5SC	50pcs per bag (Note)

Note: Orders are accepted in increments of 50pcs.

Receptacle/Jack Cap









Part No.	HRS No.	Applicable Connector	Purchase Unit
HR41-25WBR-C	CL0141-0022-7-00	HR41-25WBR-3PC HR41-25WBRA-5PC HR41-25WBJB-3PC HR41-25WBJF-3PC	50pcs per bag (Note)

Note: Orders are accepted in multiples of 50pcs.

Panel Mount Hole Dimensions





Applicable Tool

Contact Extraction Tool



Туре	Part No.	HRS No.
Contact Extraction Tool	HR41-TP	CL0150-0256-9-00

Manual Crimp Tools



Tool Maker	Part No.
HOZAN TOOL IND.CO.,LTD.	P-75
Lobtex CO., LTD	AK15A
NICHIFU Co.,Ltd.	NH1

Pneumatic Crimp Tool



Tool Maker	Part No.
Maxell Izumi Co., Ltd.	AC-5N.D Dice: Head No.1

Note: Perform maintenance in accordance with the tool manufacturer's instruction manual.